

**HYGIENIC PURPOSE
ABSOLUTE AND RELATIVE PRESSURE TRANSMITTER
Compact version
TPa-170, TPr-170**



- Piezoresistive silicon pressure sensor developed and fabricated in MTM
- Ranges 0-100mbar to 0-200 bar.
- Standard outputs 4-20mA or 0-20mA
- Compact and economical design, small overall dimensions, low weight.
- High quality of surfaces in contact with measuring fluid
- High accuracy, repeatability, long term stability and reliability

APPLICATION

Measurement of absolute and relative pressure in food pharmaceutical and industrial plants, biotechnology and in other plants requiring hygienic conditions.

Flush diaphragm with screw or nut process connection and high quality of surfaces in contact with measuring fluid allow direct installation of measuring equipment into the processing plant, which may contain chemically corrosive measuring fluids.

The device design allows thorough cleaning and flushing of tanks of plants without removing transmitters.

Compact and economical design, IP65 mechanical protection, standard process flanges, quality of material in contact with process fluid and good technical and metrological characteristics provide its wide application in various plants with hygienic characteristics and compatibility with standard automatic regulation and control systems.

STRUCTURE

Diaphragm type central section consists of flush separating diaphragm, section housing and sensor chip. The diaphragm is fabricated in special stainless steel and its purpose is to separate process fluid from oil fill and the sensor. All the parts of the central section are fully welded to each other and the interior is filled with high quality silicon oil. A circuit for passive temperature compensation of zero and span is also housed in the central section. Flushed tubular process flange with diaphragm

at its end and the central section housing are designed as a single unit. It is produced with diaphragms $\varnothing 15$, $\varnothing 19$ or $\varnothing 25$ and tube length 9, 12, 25 or 40 mm. Electronic amplifier, fabricated in the surface mount technology, supplies sensors and converts its output signal into the standard electric signal. Two or three wire electrical connection at the transmitter output is intended simultaneously for supply and measurement. The zero and range potentiometers fitted in the electronic amplifier provide additional correction of the manufacturer-preset range in the limits up to $\pm 5\%$.

OPERATION

Pressure affects separating diaphragms and oil fill, creating internal pressure in central section which deflects the sensor diaphragm. The deflection causes an unbalance of the Wheatstone bridge (four piezoresistors integrated into the diaphragm edge). The bridge unbalance is detected electronically, the obtained signal is further processed in the electronic amplifier and finally sent to the transmitter output. The output signal is linearly dependent on measured pressure.

CHARACTERISTICS

- Available ranges (0... 100... 500) and (0...400... 1000) mbar and (0... 0,8... 2), (0.. 1... 5), (0... 4... 10), (0... 8... 20), (0... 15... 50), (0... 40... 100) i (0... 80... 200) bar.
- Two-wire (4-20)mA or three-wire (0-20mA) connection
- Electric output is either cable (standard length 2m) or connector.
- Zero suppression: 100% of range
- Elevation: standardly 20% of range
- The measurement range is manufacturer-preset, and the user may perform additional corrections during transmitter operation in the range $\pm 5\%$.
- Materials: electronic unit housing Al.Cu5.Mg1.55, diaphragm 316 Stainless Steel, central section housing and process flange stainless steel. Other materials upon request.
- Diaphragm diameter $\varnothing 15$, $\varnothing 19$ or $\varnothing 25$.
- Tube length 9 or 25 mm for $\varnothing 15$ and $\varnothing 19$, 12 or 40 mm for $\varnothing 25$.
- Mounting by hollows screw self supporting nut
- Mechanical protection IP65

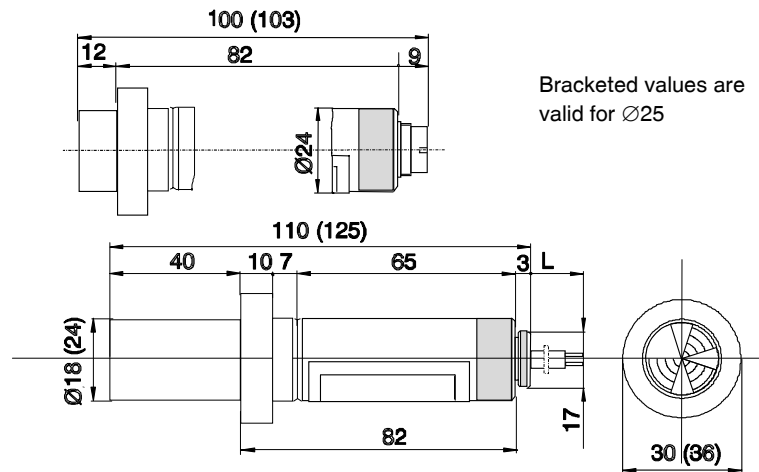


TABLE 1: GENERAL AND OPERATING CONDITIONS

Parameter	Units	Reference conditions	Normal conditions	Limit conditions	Transport conditions
Ambient temperature	°C	20±1	-30 to +80	-40 to +80	-50 to +100
Chamber temperature	°C	20±1	-30 to +80	-40 to +80	-50 to +100
Relative humidity	%	10 to 50	0 to 100	0 to 100	0 to 100
Vibration frequency	Hz			≤500	≤500
Vibration acceleration	9.81 m/s ²			≤2 ¹⁾	≤2 ¹⁾
Vibration amplitude	mm			≤0.21 ²⁾	≤0.21 ²⁾
Shock	9.81 m/s ²			≤100	≤100
Supply voltage	V	24±1	24±1	12 to 36	
Line resistance	Ω	600	600	0 to 1100	

1) Frequency range 60 to 500Hz; 2) Frequency range 10 to 60Hz

MEASUREMENT CHARACTERISTICS

- In accordance with IEC 770/84
- Accuracy (linearity, hysteresis, repeatability), table 2; independent on measuring range.
- Additional effects for minimum (4mA) and maximum (20mA) signal:
 - Power supply effect $\pm 0.01\%$ FS/1V,
 - Line resistance effect, $\pm 0.01\%$ FS/100 Ω .
 - Long term stability $\pm 0.2\%$ FS/1 year.

These effects are independent on measurement range.

- Effects of overload and ambient temperature are dependent on measurement range. They are measured for each transmitter separately and the data are enclosed in the data sheets.

TABLE 2: MEASURING ACCURACY ($\pm\%$ FS)

Class	0.20	0.40	0.60	1.00
Linearity	0.10	0.30	0.40	0.60
Hysteresis	0.05	0.05	0.10	0.20
Repeatability	0.05	0.05	0.10	0.20